

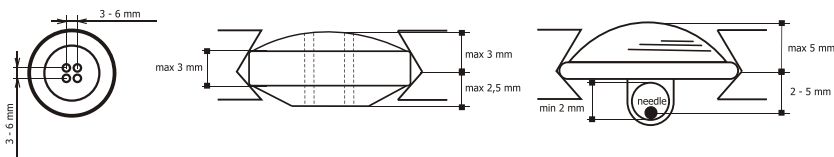


Technical Specifications EBS Mark II

| | |
|---|---|
| Stitch Type | hand stitching with floating needle technology |
| Sewing Speed | 100 - 200 spm; adjustable in increments of 5 spm |
| Button Style |  |
| Sewing Style |  |
| Button Diameter | 22" - 40" ligne (14 - 26mm) |
| Button Parameters |  |
| Neck Height | 0 - 8 mm |
| Number of Stitches | 1 - 14 |
| Number of Wraps | 0 - 30 |
| Number of Locking Stitches | 0 - 3 |
| Stitch Depth | 0 - 3 mm |
| Stitching Option | overlapping, alternating |
| Memory | 99 button patterns |
| Standard Cycle Mode | 20, 1 cycle mode = 20 button patterns |
| Prompt Cycle Mode | 20, 1 cycle mode = 2 button patterns |
| Thread Trimming | pneumatic |
| Threading | pneumatic |
| Thread Tension | electronically adjustable 1 - 20 by step motor |
| Main Drive | servo motor |
| X-Y Movements | 2 step motors |
| Stitch Depth | step motor |
| Button Feeding | step motor |
| Neck Height | step motor |
| Recommended Thread | polyester size 30, 40, 50, 70; waxed Rice size 3, 4, 5 |
| Recommended Needle | AMF Reece 2000A size 38 |
| Marking Light | LED |
| Sewing Light | LED |
| Button Holder (standard accessories) | 2-hole sew-through button holder 3-hole sew-through button holder 4-hole sew-through button holder (hole spacing 3 - 4,5 mm) 4-hole sew-through button holder (hole spacing 4,5 - 6 mm) shank button holder |
| Electrical Supply | 230V, 50/60 Hz, 1 Ph |
| Air requirements | 0,55 MPa (80 psi) |
| Dimensions Head and Table (mm) Weight (kg) | 850 (W) x 850 (D) x adjustable 800-1050 (H) 184 |
| Dimensions Packed (mm) Weight (kg) | 1014 (W) x 1016 (D) x 1482 (H) 252 |